


V56 RANGE GUILLOTINE

PRODUCT INFORMATION

The Vitrocsa V56 range offers infinite glazing surfaces using 56-mm-thick double or triple glazing. The Vitrocsa V56 range represents an evolution of our current sliding windows.

The Vitrocsa V56 window has been developed, keeping the same mechanical characteristics of the Vitrocsa systems which have proven their worth for nearly 30 years.



RAILS + FRAMES

- Embedded and concealed in the mfloor, wall and ceiling
- Saline treatment specially adapted for coastal projects

CLOSURE MECHANISM

- 1-point closure button
- Electric closure


RACCORD VERTICAL

- 25 mm
- Reinforced for very windy locations or installation at high altitudes

GLAZING

- 56 mm in double or triple glazing

MAIN CROSS SECTIONS

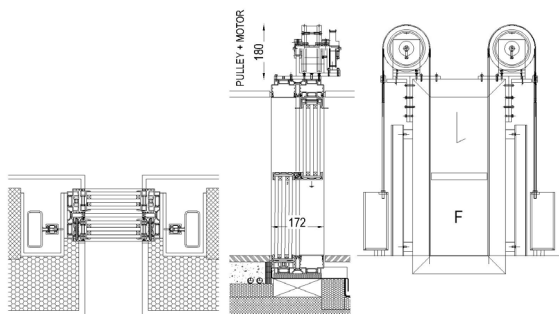

OPTIONS

- Up to 1000 kg per pane

VITROCSA Headquarters
Orchidées Constructions SA
Rue de la Gare 8
2024 Saint-Aubin-Sauges
Switzerland

T +41 24 436 22 02
F +41 24 436 22 02
www.vitrocsa.com
info@vitrocsa.com

V I T R O C S A

THE MINIMALIST WINDOW

V56 RANGE GUILLOTINE

CONFIGURATION DIAGRAMS

G3 : One counterweight on each side
(manual or motorised)

